


Oil Pattern Distance	38	Reverse Brush Drop	38	Oil Per Board	40 ul
Forward Oil Total	10.88 mL	Reverse Oil Total	8.24 mL	Volume Oil Total	19.12 mL
Tank Configuration	A Only	Tank A Conditioner	Navigate	Tank B Conditioner	Navigate

	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	2	10	A	74	0.0	1.4	1.4	2960
2	7L	7R	2	10	A	54	1.4	4.2	2.8	2160
3	9L	9R	2	10	A	46	4.2	7.0	2.8	1840
4	11L	11R	2	14	A	38	7.0	10.9	3.9	1520
5	12L	12R	2	14	A	34	10.9	14.8	3.9	1360
6	13L	13R	1	18	A	15	14.8	17.3	2.5	600
7	15L	15R	1	18	A	11	17.3	19.8	2.5	440
8	2L	2R	0	26	A	0	19.8	30.0	10.2	0
9	2L	2R	0	30	A	0	30.0	38.0	8.0	0

	START	STOP	LOADS	SPEED	TANK	CROSSED	START	END	FEET	T.OIL
1	2L	2R	0	30	A	0	38.0	30.0	-8.0	0
2	13L	13R	2	22	A	30	30.0	23.8	-6.2	1200
3	12L	12R	2	18	A	34	23.8	18.7	-5.1	1360
4	10L	10R	2	14	A	42	18.7	14.8	-3.9	1680
5	9L	9R	2	14	A	46	14.8	10.9	-3.9	1840
6	7L	7R	2	14	A	54	10.9	7.0	-3.9	2160
7	2L	2R	0	10	A	0	7.0	0.0	-7.0	0

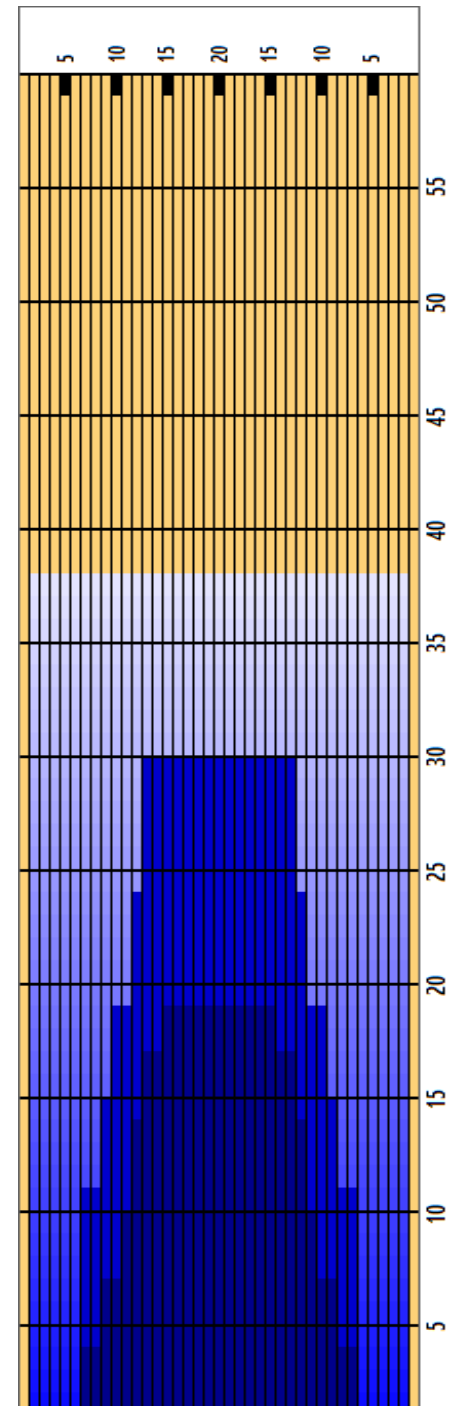

Cleaner Ratio Main Mix 5:1 Forward
 Cleaner Ratio Back End Mix 5:1 Reverse
 Cleaner Ratio Back End Distance 59 Combined

Buffer RPM: 4 = 700 | 3 = 500 | 2 = 200 | 1 = 100



Rødovre Bowlinghal's Hus profil

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside:Middle	Middle:Middle	Inside:Middle	Middle: Inside	Middle:Middle	Middle:Outside
Track Zone Ratio	7.86	1.83	1.02	1.02	1.83	7.86

